


## ROHRflex PA 6 S

## ROHRflex corrugated plastic tubings

Protective all-plastic tubing, internally and externally corrugated, fine profile, reduced fire protection, for simple applications, HB (UL 94)

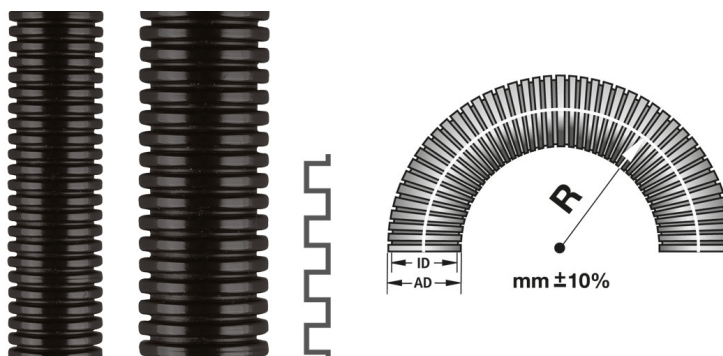

**Temperature:** -40°C ... +120°C ^ +150°C

**Material:** PA 6 plastics

**Protection class [acc. to EN 60529]:** IP 69K



FLEXA No.	Colour	OD [mm]	Profile	DI [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
0233.209.006	Black	10,0	fine	6,5	10,0	13	35	0,020	50
0233.209.010	Black	13,0	fine	10,0	13,0	20	45	0,030	50
0233.209.012	Black	15,8	fine	12,0	15,8	35	55	0,035	50
0233.209.014	Black	18,5	fine	14,3	18,5	40	65	0,045	50
0233.209.016	Black	21,2	fine	16,5	21,2	45	75	0,060	50
0233.209.023	Black	28,5	fine	23,0	28,5	55	100	0,100	50
0233.209.029	Black	34,5	fine	29,0	34,5	65	120	0,120	25
0233.209.036	Black	42,5	fine	36,0	42,5	90	150	0,150	25
0233.209.048	Black	54,5	fine	48,0	54,5	100	190	0,220	25
0233.209.106	Black	10,0	fine	6,5	10,0	13	35	0,020	10
0233.209.110	Black	13,0	fine	10,0	13,0	20	45	0,030	10
0233.209.123	Black	28,5	fine	23,0	28,5	55	100	0,100	10
0233.209.112	Black	15,8	fine	12,0	15,8	35	55	0,035	10
0233.209.116	Black	21,2	fine	16,5	21,2	45	75	0,060	10
0233.209.129	Black	34,5	fine	29,0	34,5	65	120	0,120	10
0233.209.136	Black	42,5	fine	36,0	42,5	90	150	0,150	10
0233.209.148	Black	54,5	fine	48,0	54,5	100	190	0,220	10
0232.201.006	Grey	10,0	fine	6,5	10,0	13	35	0,020	50
0232.201.010	Grey	13,0	fine	10,0	13,0	20	45	0,030	50
0232.201.012	Grey	15,8	fine	12,0	15,8	35	55	0,035	50
0232.201.014	Grey	18,5	fine	14,3	18,5	40	65	0,045	50
0232.201.016	Grey	21,2	fine	16,5	21,2	45	75	0,060	50
0232.201.023	Grey	28,5	fine	23,0	28,5	55	100	0,100	50
0232.201.029	Grey	34,5	fine	29,0	34,5	65	120	0,120	25
0232.201.036	Grey	42,5	fine	36,0	42,5	90	150	0,150	25
0232.201.048	Grey	54,5	fine	48,0	54,5	100	190	0,220	25

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.